


Radiator flex, corrugated cooling hose




Product group	140
Color	Black
Cover design	Corrugated
Inner tube resistance	Heat
Media description	Water
Safety factor	1:3
Bundled pipes/hoses	1
Cover tube resistance	Abrasion, Heat, Oil
Flat coil	No
Inner tube material	EPDM
Antistatic wire	No
Cover tube material	EPDM
Max temperature (°C)	120
Reinforcement layers	No extra reinforcement
Reinforcement materials	Steel wire, Textile
Min temperature (°C)	-40

The hose is used as a cooling hose in vehicles where there is a requirement for high flexibility. Its special corrugation allows hard bends without folding. Also used as a hot water hose in the industry.

Part no	ID (mm)	Vacuum pr. Max%	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Weight (kg)
14095008	13	80	40	22	50	0.5	0.35
14095010	16	80	40	25	60	0.5	0.39
14095012	20	80	40	29	70	0.5	0.46
14095014	22	80	40	31	75	0.5	0.52
14095016	25	80	40	34	85	0.5	0.57
14095018	28	80	40	37	95	0.5	0.63
14095020	32	80	40	41	105	0.5	0.75
14095022	35	80	40	44	115	0.5	0.81
14095024	38	80	40	47	130	0.5	0.87
14095026	42	80	40	51	140	0.5	0.95
14095030	45	80	40	54	150	0.5	1
14095032	51	80	40	60	165	0.5	1.12
14095039	60	80	40	70	200	0.5	1.7
14095040	63	80	40	73.5	210	0.5	1.8

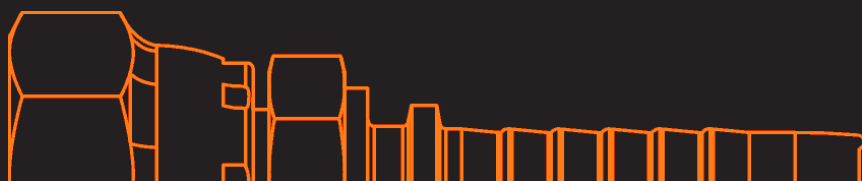

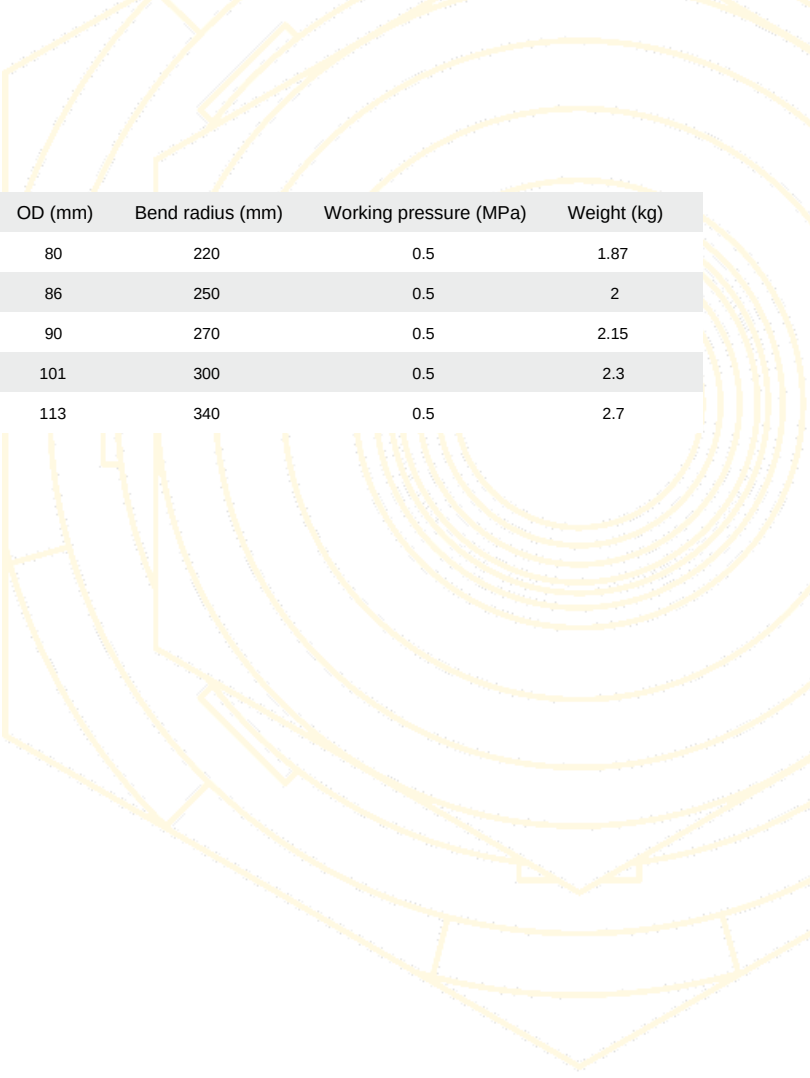

Part no	ID (mm)	Vacuum pr. Max%	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Weight (kg)
14095044	70	80	40	80	220	0.5	1.87
14095048	76	80	40	86	250	0.5	2
14095051	80	80	40	90	270	0.5	2.15
14095056	90	80	40	101	300	0.5	2.3
14095064	102	80	40	113	340	0.5	2.7

