

Maritim hose for wet exhaust SAE J2006




Product group	140
Color	Black
Cover design	Corrugated
Safety factor	1:3
Bundled pipes/hoses	1
Media description	Ventilation, Water
Antistatic wire	No
Cover tube material	EPDM
Flat coil	No
Inner tube material	EPDM
Certificate	Lloyds Registry of Shipment
Max temperature (°C)	120
Reinforcement layers	No extra reinforcement
Reinforcement materials	Steel wire, Textile
Min temperature (°C)	-30

Marine diesel and exhaust hose according to SAE J2006 R1 and R2. Resistent to water, wet exhaust gases, ozone and UV-abrasion. Low weight with corrugated cover. The steel spiral and the design of the hose make it very flexible. Approved by Lloyds Register of Shipping 02/00029

Part no	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Vacuum pr. Max%	ID (mm)	Length meter per coil	Weight (kg)
14347020	40	48	0.4	80	32	40	0.65
14347024	50	60	0.4	80	40	40	0.89
14347028	55	68	0.4	80	45	40	1
14347032	61	78	0.4	80	51	40	1.13
14347035	67	86	0.3	80	57	40	1.25
14347039	70	90	0.3	80	60	40	1.31
14347040	73	95	0.3	80	65	40	1.39
14347048	87	115	0.3	80	76	40	1.61
14347056	101	135	0.2	80	90	40	2.11
14347064	112	155	0.2	80	102	20	2.35
14347069	122	167	0.2	80	110	20	2.82
14347080	139	190	0.2	80	127	20	3.18
14347096	165	230	0.2	80	152	20	4.16
14347203	218	305	0.2	80	203	20	6.54



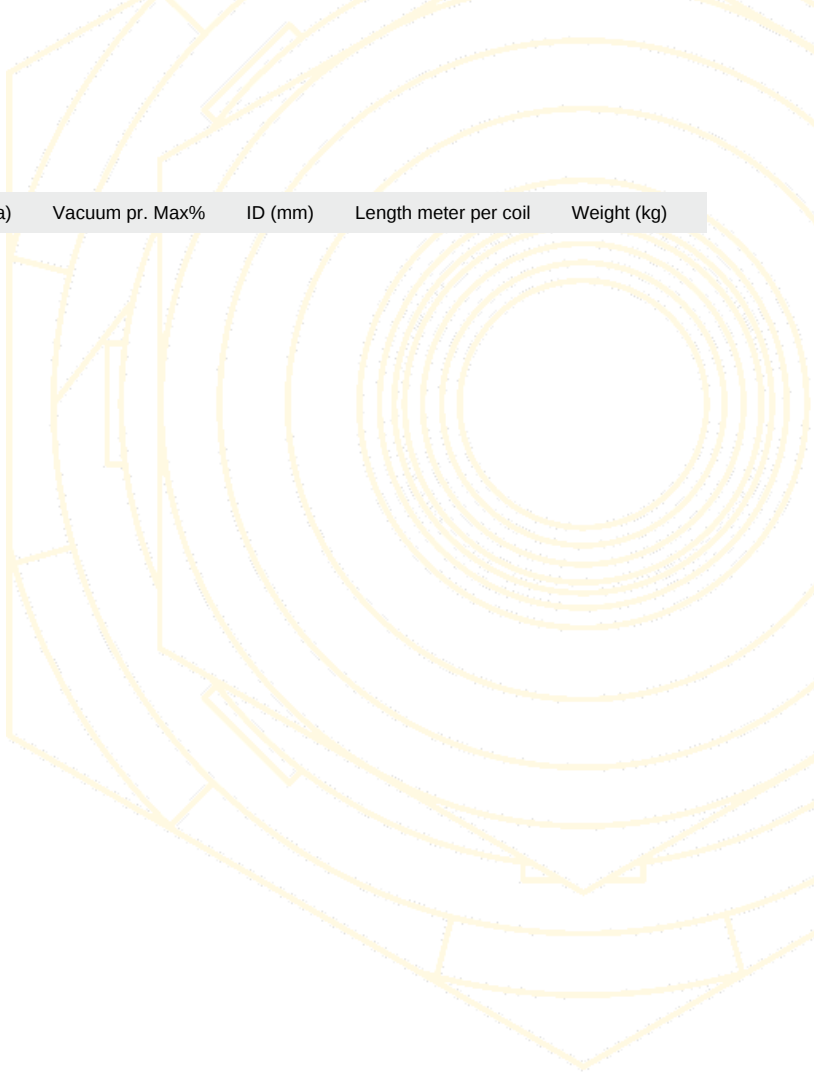

Part no	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Vacuum pr. Max%	ID (mm)	Length meter per coil	Weight (kg)
---------	---------	------------------	------------------------	-----------------	---------	-----------------------	-------------

