


WELDARC, WELDING HOSE EN 559 ISO 3821 20 BAR

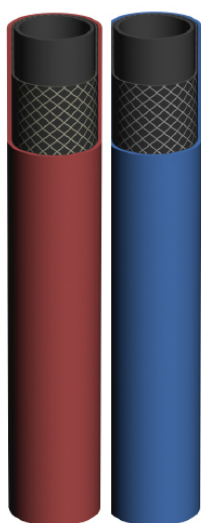

Product group	140
Cover design	Smooth
Safety factor	1:3
Bundled pipes/hoses	1
Inner tube material	SBR
Antistatic wire	No
Cover tube material	SBR/EPDM
Flat coil	No
Max temperature (°C)	60
Reinforcement layers	1
Reinforcement materials	PE
Min temperature (°C)	-20

This welding hose is suitable for all types of aggregates, high ignition temperature and low diffusion. It is very good air pressure hose and flexible even in low temperatures. According to the latest European Norm ISO 3821.

Part no	Color	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Weight (kg)
14400103	Red	50	12	50	2	5	0.13
14400104	Red	50	13.3	60	2	6.3	0.15
14400105	Red	50	15	80	2	8	0.18
14400106	Red	50	17	100	2	10	0.2
14400203	Blue	50	12	50	2	5	0.13
14400204	Blue	50	13.3	60	2	6.3	0.15
14400205	Blue	50	15	80	2	8	0.18
14400206	Blue	50	17	100	2	10	0.2

