


Twinarc, twin welding hose EN 559, ISO 3821, 20 bar

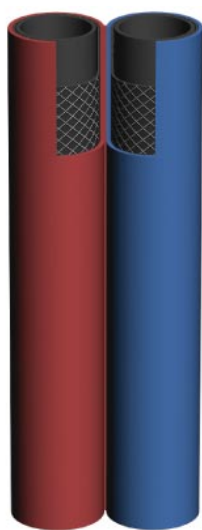

Product group	140
Cover design	Smooth
Media description	Gas and welding
Safety factor	1:3
Bundled pipes/hoses	2
Inner tube material	SBR
Antistatic wire	No
Cover tube material	SBR/EPDM
Flat coil	No
Max temperature (°C)	60
Reinforcement layers	1
Reinforcement materials	PE
Min temperature (°C)	-20

Twin welding hose for engineering and construction industries. The hose is also flexible in low temperatures. According to the latest European Norm ISO 3821.

Part no	ID (mm)	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Weight (kg)
14410003	5	50	12	50	2	0.26
14410004	6.3	50	13.3	60	2	0.3
14410005	8	50	15	80	2	0.36
14410006	9	50	16	100	2	0.42

