


SPIR STAR, TYPE 6



Safety factor	1:2.5
Max temperature (°C)	80
Reinforcement layers	6
Reinforcement materials	Steel wire
Min temperature (°C)	-30

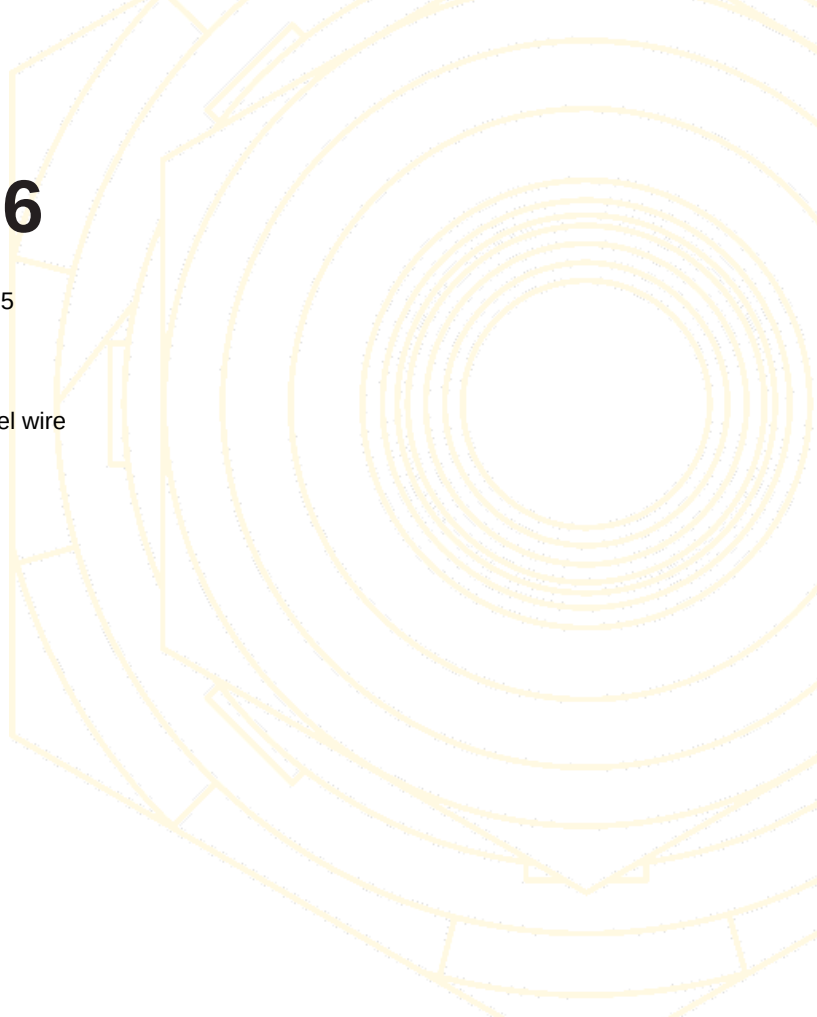

Part no	OD (mm)	Working pressure (MPa)	Bend radius (mm)	ID (inch)	ID (mm)	Weight (kg)
12014002	11.5	280	175	1/8"	4	0.36
12014003	13.4	262	200	3/16"	5	0.45
12014005	16.4	200	250	5/16"	8	0.64
12014006	20.4	192	250	3/8"	9.8	1
12014008	23.4	168	300	1/2"	12.8	1.16
12014012	31.4	140	350	3/4"	18.8	1.92

