


Metal hose, parallel wrapped



Product group	140
Safety factor	1:4
Antistatic wire	No
Flat coil	No
Max temperature (°C)	550
Reinforcement materials	Stainless steel (1.4301)
Min temperature (°C)	-200

Metal hose suitable for hot oils, chemicals, gases, exhaust gases, water, steam, vacuum etc. The hose can also be used as mechanical cable protection. Inner tube: Stainless steel (1.4541 EN 10088-1) Suffix F Stainless steel (1.4404 EN 10088-1) Suffix S

Part no	OD (mm)	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Weight (kg)
14840106F	17.5	190	7.5	10.6	0.24
14840106S	17.5	190	7.5	10.6	0.24
14840108F	19.5	210	7	12.3	0.29
14840108S	19.5	210	7	12.3	0.3
14840110F	25.2	285	6.5	15.7	0.37
14840110S	25.2	285	6.5	15.7	0.4
148401128F	232	1,400	0.6	200	10.99
148401128S	232	1,400	0.6	200	10.98
14840112F	30.3	310	5	19.8	0.52
14840112S	30.3	310	5	19.8	0.55
14840116F	36	375	4	25.8	0.66
14840116S	36	375	4	25.8	0.66
14840120F	45.7	405	3.5	33	1
14840120S	45.7	405	3.5	33	1.01
14840124F	54	480	3	40	1.17
14840124S	54	480	3	40	1.16
14840132F	67.5	550	2.5	51.6	1.55
14840132S	67.5	550	2.5	51.6	1.56
14840140F	87.9	675	2	66	2.47

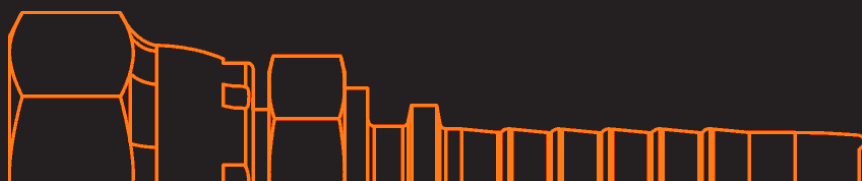

Part no	OD (mm)	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Weight (kg)
14840140S	87.9	675	2	66	2.47
14840148F	100	750	1.8	76.6	2.89
14840148S	100	750	1.8	76.6	2.88
14840164F	128	920	1.4	103	4.14
14840164S	128	920	1.4	103	4.3
14840180F	154.5	1,160	1.25	127.5	5.83
14840180S	154.5	1,160	1.25	127.5	5.77
14840196F	180	1,320	1	151.5	6.64
14840196S	180	1,320	1	151.5	6.64

