


Polyurethane hose 2,5 mm

Performance



Product group	140
Cover design	Corrugated
Bundled pipes/hoses	1
Media description	Materials
Antistatic wire	No
Cover tube material	PUR
Flat coil	No
Inner tube material	PUR
Max temperature (°C)	90
Min temperature (°C)	-40

Part no	Bend radius (mm)	Weight (kg/m)	Working pressure (MPa)	ID (mm)	Vacuum pr. Max%	Length meter per coil	OD (mm)	Weight (kg)
156315200	840	5	0.08	200	55	10	215	5
15631524	130	0.8	0.44	38	94	10	50	0.8
15631525	135	0.8	0.43	40	94	10	52	0.8
156315250	1,050	7.1	0.04	250	-	10	266	7.1
15631532	170	1.2	0.4	51	94	10	66	1.2
15631538	175	1.3	0.38	55	94	10	72	1.3
15631539	185	1.5	0.37	60	94	10	77	1.5
15631540	190	1.6	0.35	65	94	10	82	1.6
1563154090	245	1.87	0.32	65	94	20	92	1.87
15631548	250	1.9	0.32	76	94	10	93	-
1563154890	250	1.9	0.32	76	94	20	93	-
15631551	270	2.1	0.29	80	94	10	97	-
15631556	285	2.4	0.27	90	94	10	107	-
15631564	300	2.6	0.25	102	94	10	119	-
1563156490	300	2.6	0.25	102	94	20	119	-
15631580	350	3.3	0.2	127	94	10	144	-
15631585	370	3.46	0.18	140	94	10	154	-
15631596	400	3.7	0.15	152	94	10	169	3.7
1563159691	400	3.7	0.15	152	94	6	169	3.7
1563159692	400	3.7	0.15	152	94	20	169	3.7

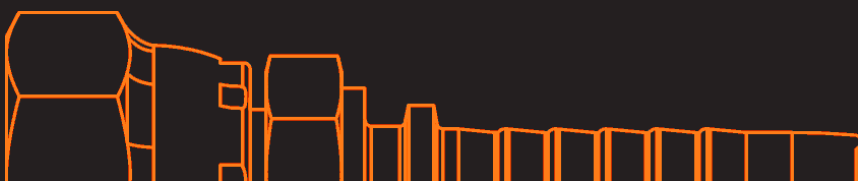



Part no	Bend radius (mm)	Weight (kg/m)	Working pressure (MPa)	ID (mm)	Vacuum pr. Max%	Length meter per coil	OD (mm)	Weight (kg)
1563159693	400	3.7	0.15	152	94	15	169	3.7

