


Flange gasket 1,5mm grafilit

Product group


505

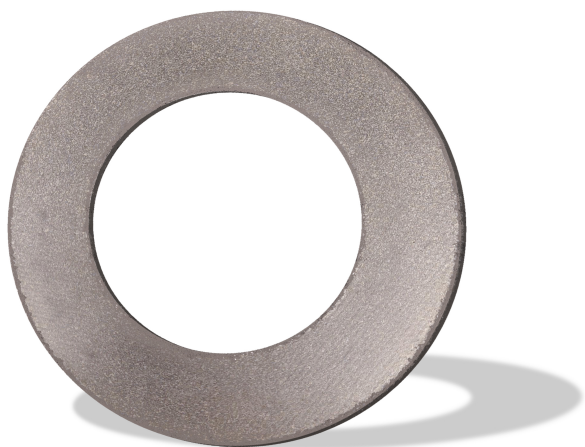

Heavy duty gasket for the industry's most demanding applications. The gaskets are made of graphite (>99% purity) with an acid-proof steel insert. The material has a non-stick surface which makes it excellent for applications with high temperatures. Withstands basically all types of media except strongly oxidizing acids at high temperatures. This material is used for water and steam applications where the temperature exceeds 115°C. Complies with fire test ISO 10497. Manufacturing according to EN1514-1.

Part no	Material	Color	DN	ID (mm)	OD (mm)	Thickness (mm)	Max temperature (°C)	Weight (kg)
56124008	Grafilit	Grey	15	22	51	1.5	550	-
56124012	Grafilit	Grey	20	27	61	1.5	550	-
56124016	Grafilit	Grey	25	34	71	1.5	550	0.01
56124020	Grafilit	Grey	32	43	82	1.5	550	0.01
56124024	Grafilit	Grey	40	49	92	1.5	550	0.01
56124032	Grafilit	Grey	50	61	107	1.5	550	0.01
56124039	Grafilit	Grey	60	72	117	1.5	550	0.01
56124040	Grafilit	Grey	65	77	127	1.5	550	0.02
56124048	Grafilit	Grey	80	89	142	1.5	550	0.02
56124064	Grafilit	Grey	100	115	162	1.5	550	0.02
56124080	Grafilit	Grey	125	141	192	1.5	550	0.03
56124096	Grafilit	Grey	150	169	218	1.5	550	0.02
56124200	Grafilit	Grey	200	220	273	1.5	550	0.04
56124250	Grafilit	Grey	250	273	328	1.5	550	0.06
56124300	Grafilit	Grey	300	324	378	1.5	550	0.06
56124600	Grafilit	Grey	600	610	695	1.5	550	0.25



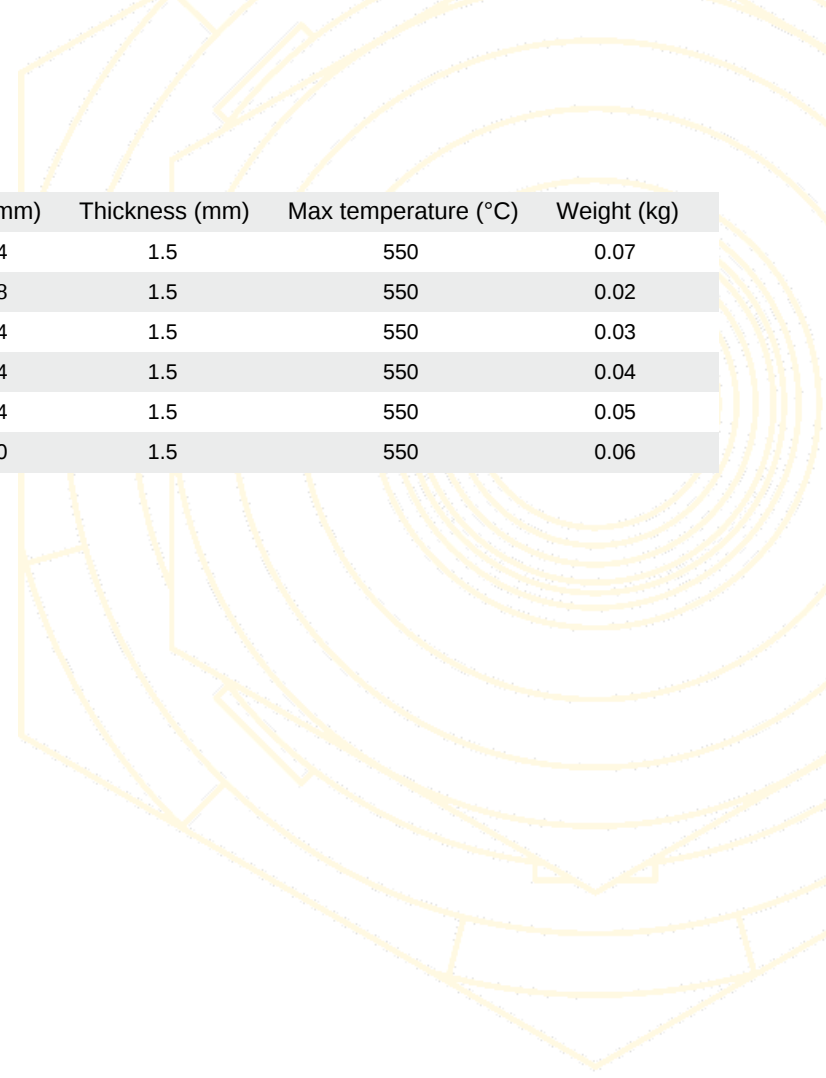

Part no	Material	Color	DN	ID (mm)	OD (mm)	Thickness (mm)	Max temperature (°C)	Weight (kg)
56125300	Grafilit	Grey	300	324	384	1.5	550	0.07
56126064	Grafilit	Grey	100	115	168	1.5	550	0.02
56126080	Grafilit	Grey	125	141	194	1.5	550	0.03
56126096	Grafilit	Grey	150	169	224	1.5	550	0.04
56126200	Grafilit	Grey	200	220	284	1.5	550	0.05
56127200	Grafilit	Grey	200	220	290	1.5	550	0.06

